C4581G-A1

C6081G-A1

C0081G-A1

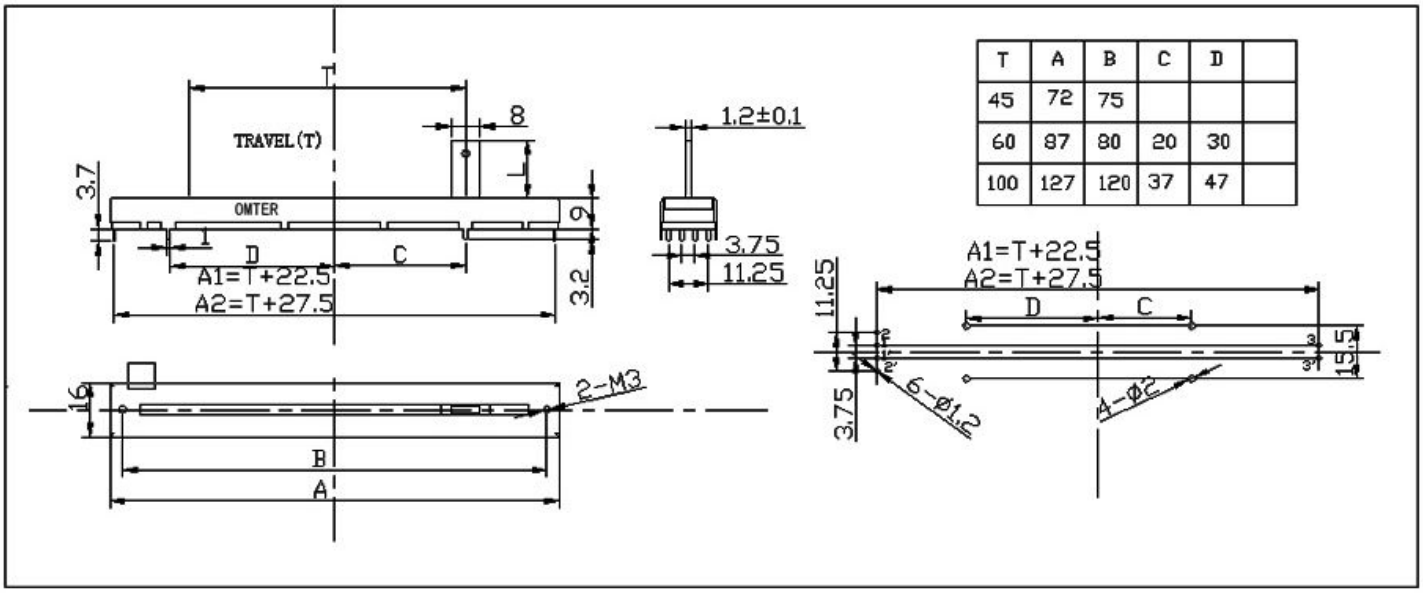

T	A	B	C	D	
45	72	75			
60	87	80	20	30	
100	127	120	37	47	

参数特性General Specification:

全阻抗值：Total Resistance	1KΩ～1MΩ
全阻抗值容许差：Total Resistance tolerance	±20%(More than 500kΩ±30%)
残留阻值：Residual resistance	Less than 10Ω
	between terminal 1&2
	Less than 10Ω
	between terminal 2&3
抵抗变化特性：Resistance Tape	A,B,C,D,W
定格电力：（W）Ratings Power	Single unit, B curve,0.5W
	except B,0.25W
	Dual unit, B curve,0.25W
	except B,0.125W
滑动杂音:Slider noise	Less than 47mV
绝缘抵抗:Insulation Resistance	More than 100mΩ at DC 250V
耐电压:Voltage proof	1minute at AC 250V
连动误差:Gang error	-40～0dB at ±3dB(for dual unit only)
滑动寿命:Sliding Life	More than 10,000 cycles Min
滑动力矩:Operating Force	10～50gf.cm
滑动止动强度:Lever stopper strength	3Kgf
把柄之偏心:Lever deviation	0.5Max(one side)