相关单位名称代号

R15S 0505 W300

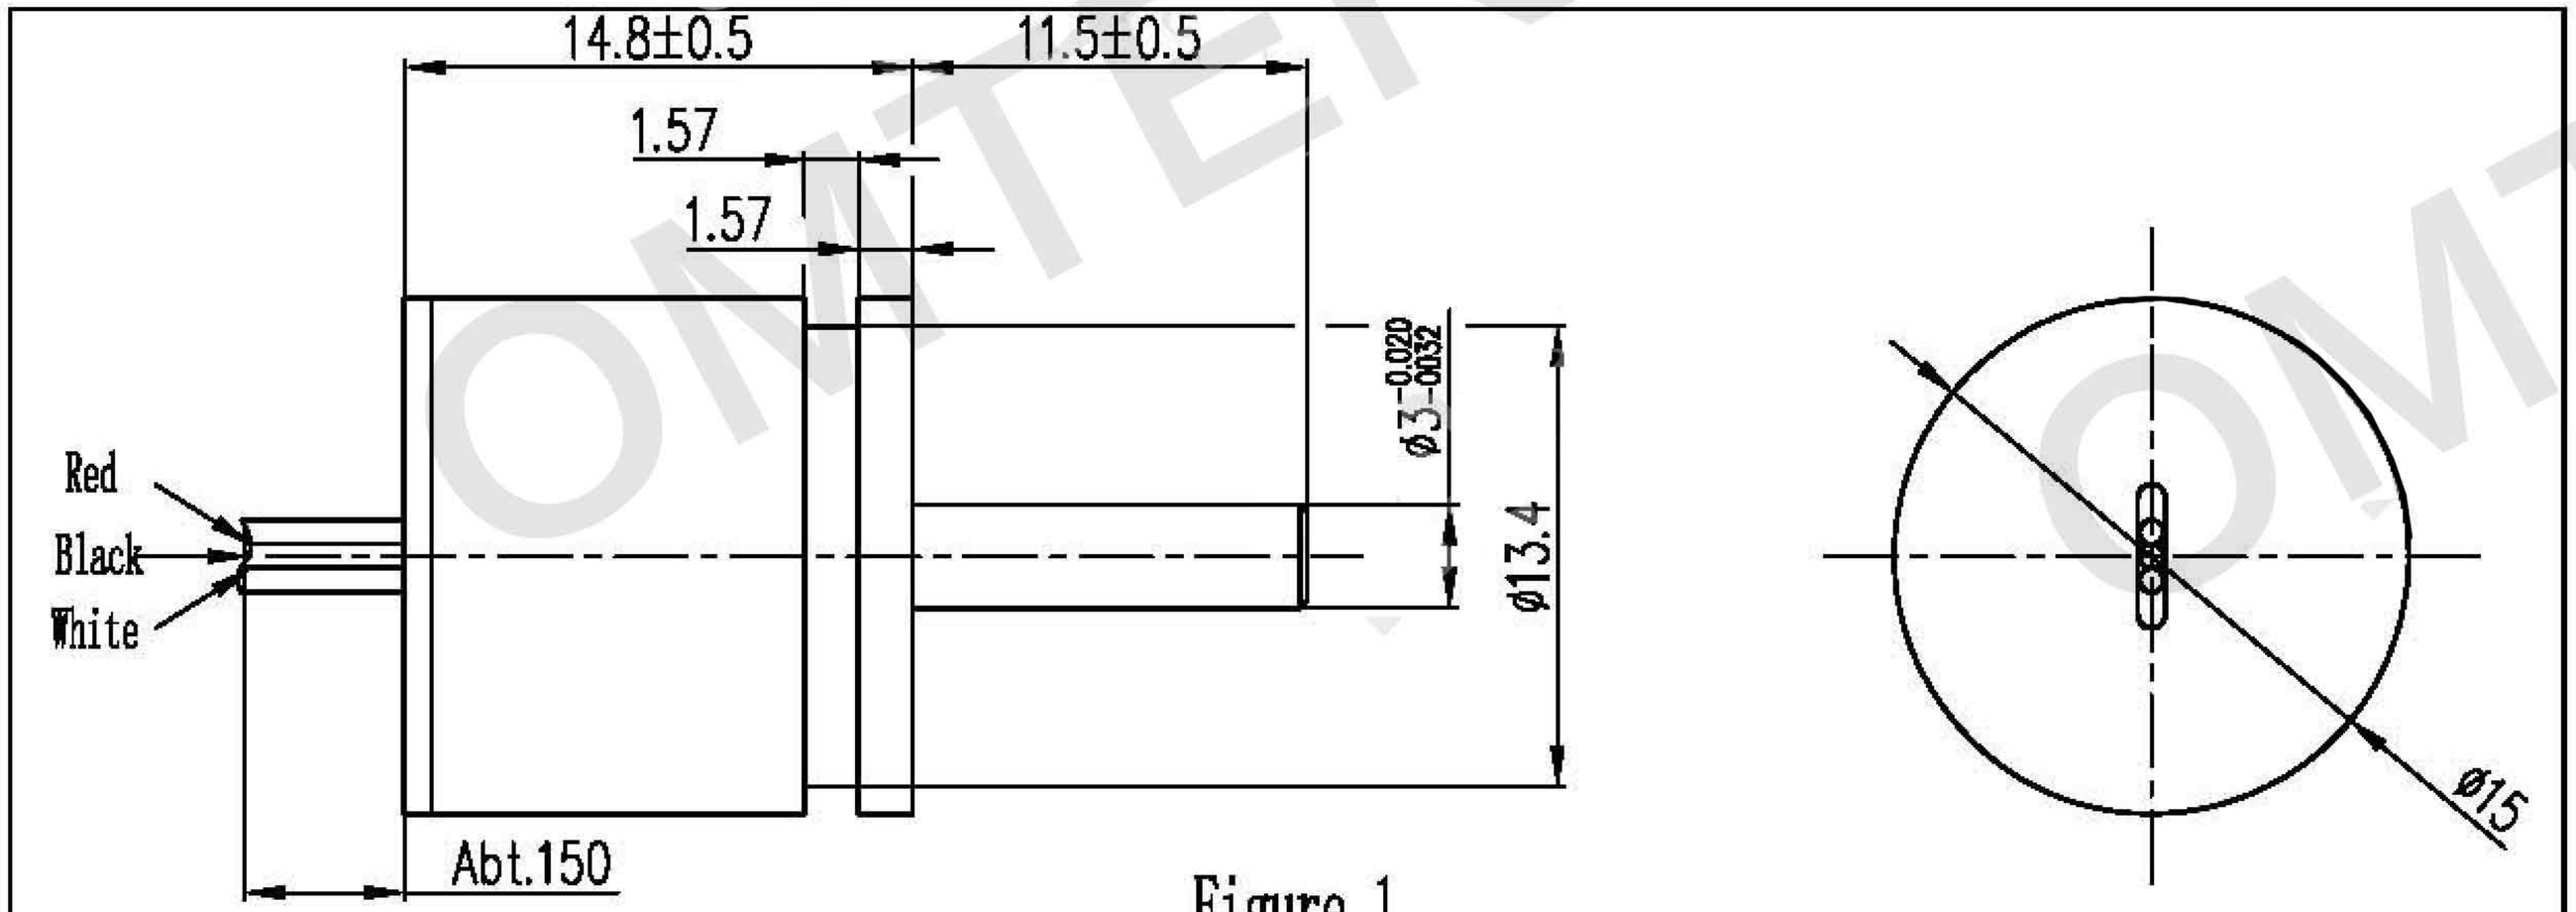

Figure 1

Mechanical performance

1. Boundary dimension: Figure 1
2. Mecanical rotating angle: 360°
3. Protection grade: IP65
4. Rotating torque: Within 1mN•m
5. Mass: Approx 12g
6. Operation temperature range: -30℃~+80℃
7. With 2 servo mounting nails

Electical performance

1. Electrical angle: 360°
2. Applied voltage: 5V±10%D.C
3. Output voltage: Figure 2
4. Independent linearity tolerance: ±0.5%
5. Corrent consumption: within 16mA

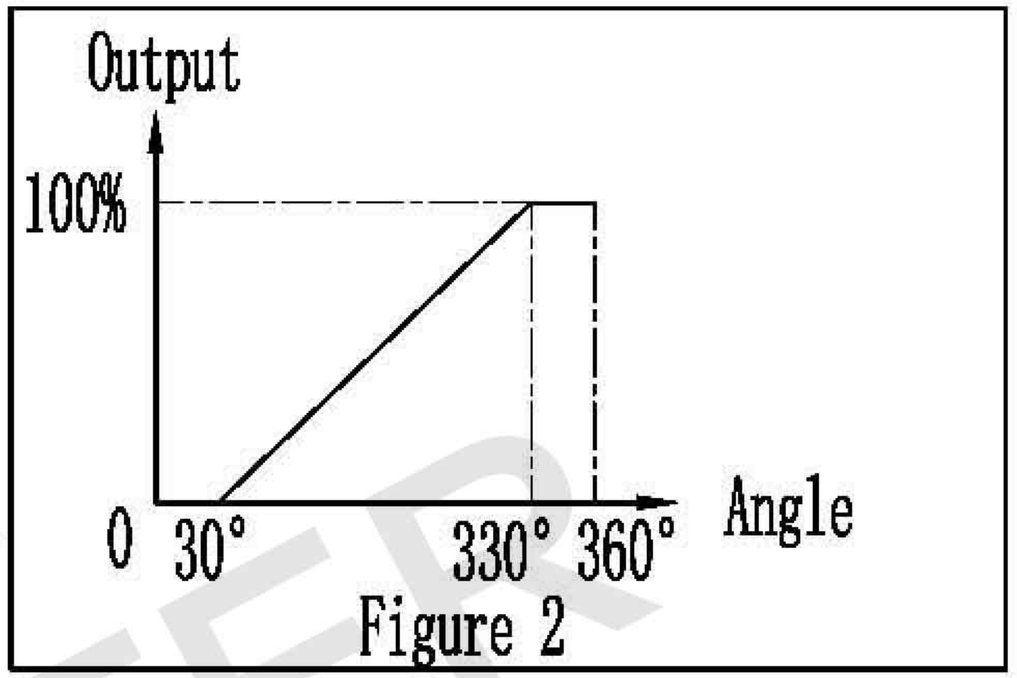

Figure 2

This drawing is a temporary drawing, which will be confirmed by the customer, and the formal drawing shall be subject to the customer's confirmation.

标记	处数	分区	更改文件号	签名	年月日
设计	黄一亭 2018.01.23 17:20:18 +08'00'		标准化		
审核	姚振宇 2018.01.23 17:20:37 +08'00'				
工艺			批准		

阶段标记 | 重量 | 比例

共 张 第 张

乐清市欧姆特尔电子科技有限公司
YUEQING OMTER ELECTRONIC&TECHNOLOGY CO.,LTD.

R15S 0505 w300

18012317

OMTER